

Engaging Presentation



Interactive Learning



TRU TOUCH *UB Series*



Product Specifications

Model Name	TT-6516UB	TT-7516UB	TT-8616UB
Active Screen Size ("inch)	65"	75"	86"
Display Backlight		LED	
Display Area	1428.5 x 803.5mm	1650 x 973mm	1895 x 1066mm
Display Ratio		16 : 9	
Resolution		3840 x 2160 Pixel (4K)	
Display Colors		10 bit	
LCD Brightness		370 cd/m2	
Contrast Ratio (Typical)		4000:1	
Response Time (Typical)		8 ms	
Viewing Angle		178°	
Life Time (working hours)		Minimum 30,000 hours	
Power Consumption Max.	Maximum <220W	Maximum <350W	Maximum <450W
Touch Surface Material		Tempered glass	
Touch Surface Technology		Anti-Glare glass	
Transparency		>88%	
Touch Sensor		Infrared Touch	
Touch Points		10 Points under Windows system	
Touch Screen Writing Tools		Nano Pen (>6mm width) included or Finger	
Cursor Speed		125 Point/s	
Positioning Accuracy		1 mm	
Communication Interface		USB-B	
Speaker Position		Forward	
Speaker Max.Power Output		15W x 2	
Transmission Range		5M	
Android System		Version 5.0.1	
Installation Method (optional)		Wall-mounted / Floor Stand	
Outline Dimension	1544.03 x 939.1 x 99.1 mm	1768 x 1066 x 114 mm	2019 x 1209 x 116 mm
Packing Dimension	1705 x 1080 x 265 mm	1923 x 1215 x 280 mm	2180 x 1340 x 340 mm
Net Weight	43 KG	57 KG	72 KG
Gross Weight	57 KG	77 KG	96 KG



Easily Write and Erase



Annotation



Record



Handwriting



Rugged



Easy of Use



Import Video



Android




HDMI



Product Advanced Features

Connectivity

Share everything by the way you like to use, not only physical cable to input but also wireless solution.

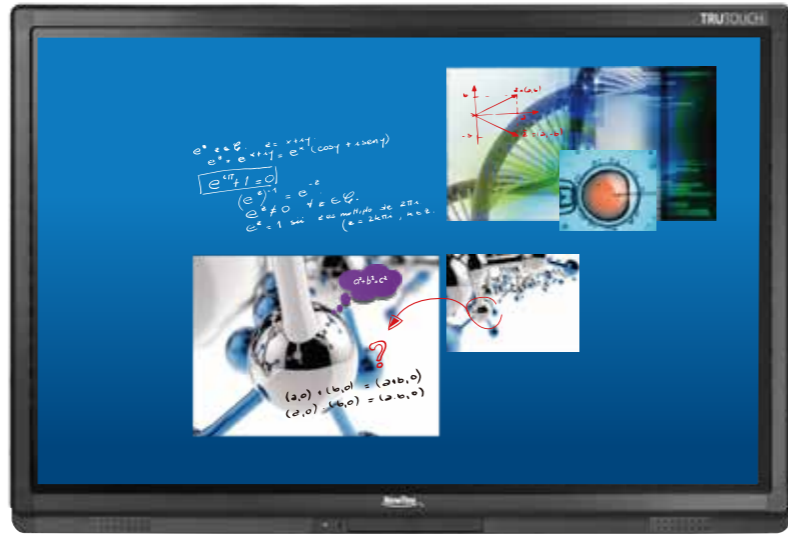

Internal PC OPS (Optional)	Screen Projection & Touch Control PC/Mac	Object Projection Document Camera	Wireless Presentation TRUCAST (Optional)
--	--	---	--

Zero Training Easy Operation

With its simple user interface no training needed to learn TRUTOUCH. Simply following the icon and use TRUTOUCH basic function without any difficulty.



Android System Tool Bar
Whiteboard Function Bar

Input Source Selection				
Source				

Excellent 4K Resolution



Antiglare Glass



Responsive 10 points Touch

TRUTOUCH supports multi-touch to 10 points. Creating the interaction environment for conference room.



Integrated Sound Bar



Plug & Play



Support Multiple Input & Output

TRUTOUCH allows users to share information by their own devices. You may find all of the major I/O ports on TRUTOUCH front sides and rear sides as well.

VGA IN x 1	HDMI IN x 4, Out x 1	TOUCH-USB x 4	Micro SD IN x 1	USB Android x 2 PC x 2	AUDIO Audio In (VGA) x1 Audio Out x1 Earphone x1
MIC IN x 1	DisplayTouch IN x 1	RS232 x 1	LAN x 2	AV-IN x 1	